

FIG 1

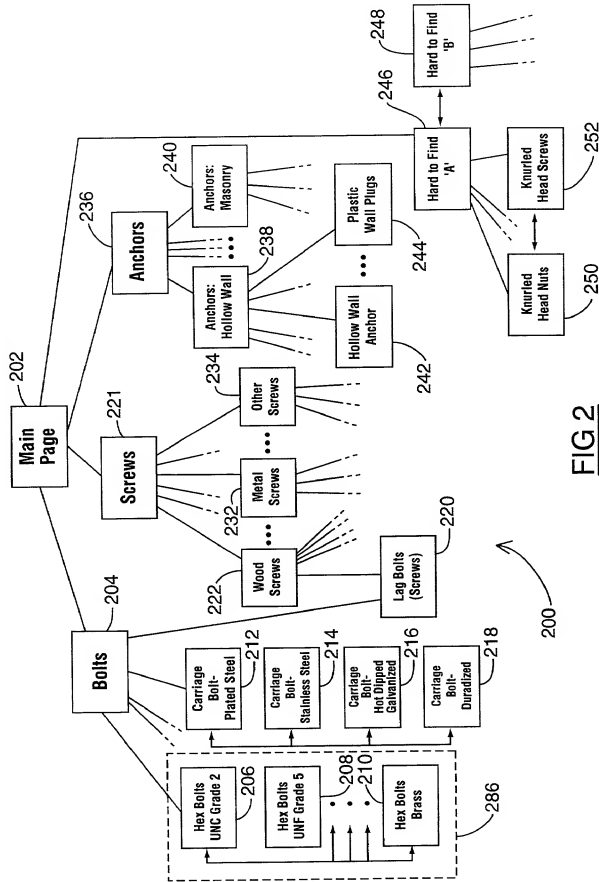


FIG 2

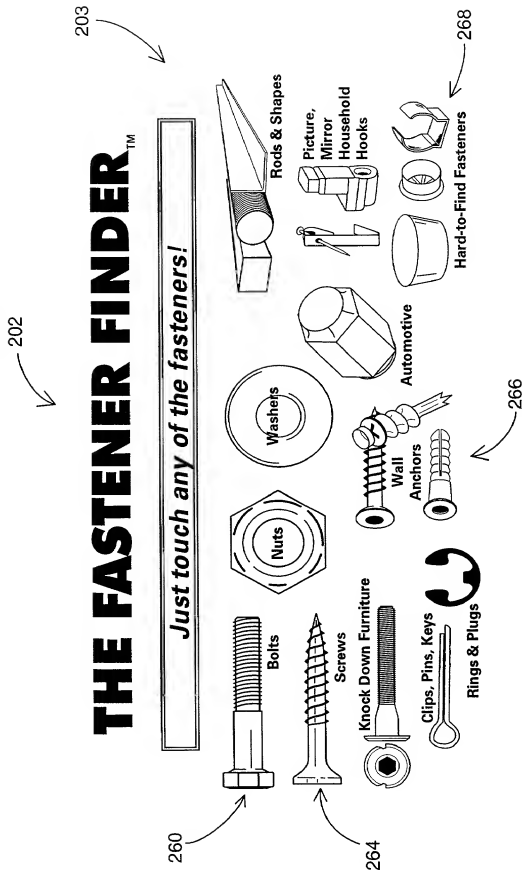


FIG 3

Bolts Main Page



280


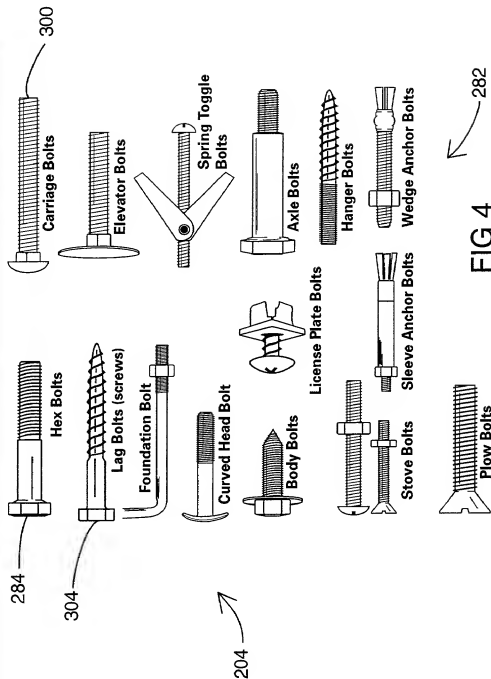


FIG 4

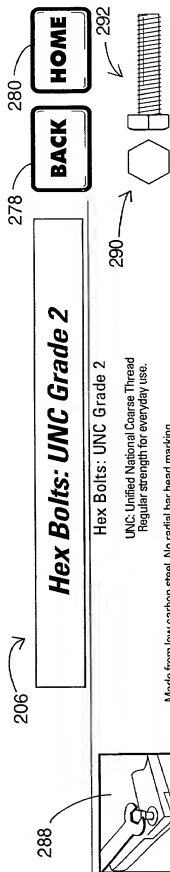

Hex Bolts: UNC Grade 2

Hex Bolts: UNC Grade 2

UNC: Unified National Coarse Thread
Regular strength for everyday use.

Made from low carbon steel. No radial bar head marking.

Tensile Strength: up to 5/8" - 64,000 p.s.i. (min) 3/4" diameter up to 55,000 p.s.i. (min)

Minimum thread length formula		Wrench sizes for Hex Heads									
Bolts 6" or shorter - 2x diameter + 1/4"	Bot dia.	1/4	5/16	3/8	7/16	1/2	9/16	5/8	3/4	7/8	1 1/8
Bolts longer than 6" - 2x diameter + 1/2"	Wrench Size	7/16	1/2	9/16	5/8	3/4	7/8	1 1/8	1 1/4	1 3/4	2

*Note Actual thread length may be longer

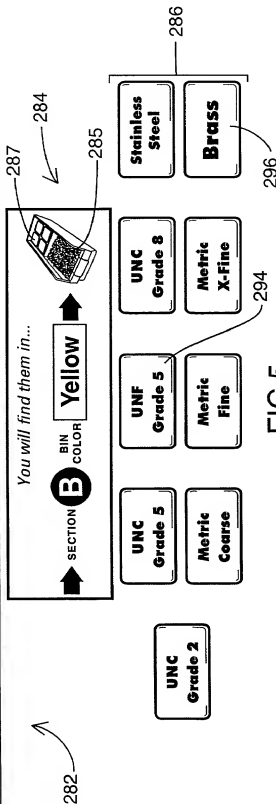


FIG 5

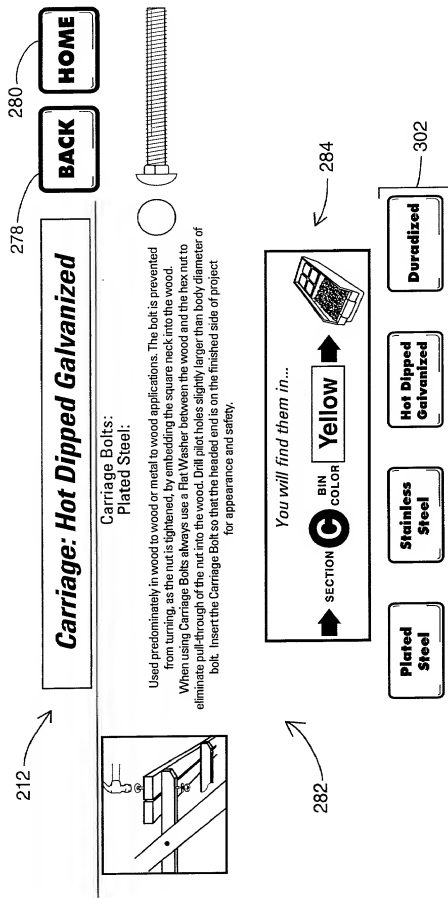


FIG 6

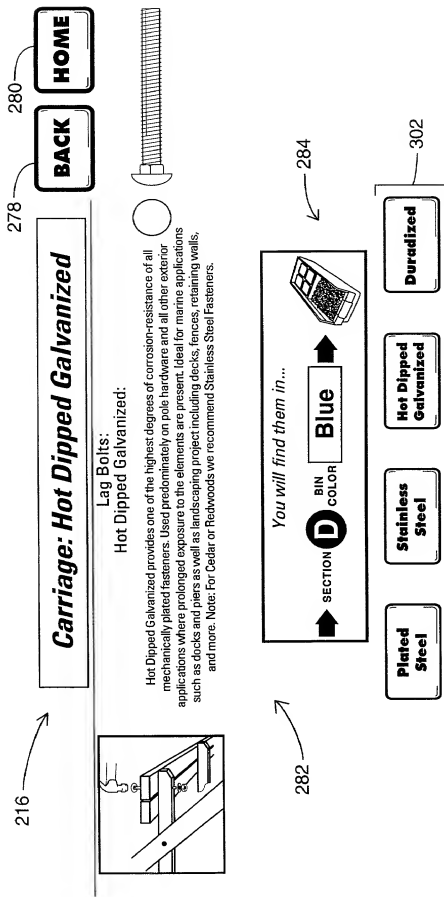


FIG. 7

Screws for Wood

HOME

Please touch any of the fasteners below... or a different category button

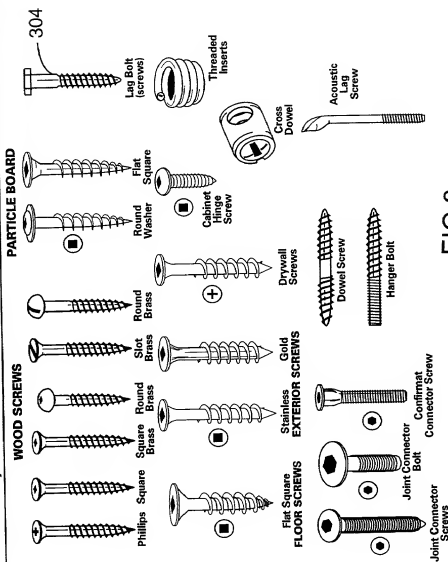


FIG 8

238


Bolts Main Page

280


HOME




E-Z Anchor



Plastic Wall Plugs



E-Z Toggle



Spring Toggle Bolts



308



Hollow Wall Anchor



Hammer Hooks



310





Anchor Hooks




**Concrete,
Brick
Block Anchors**

FIG 9


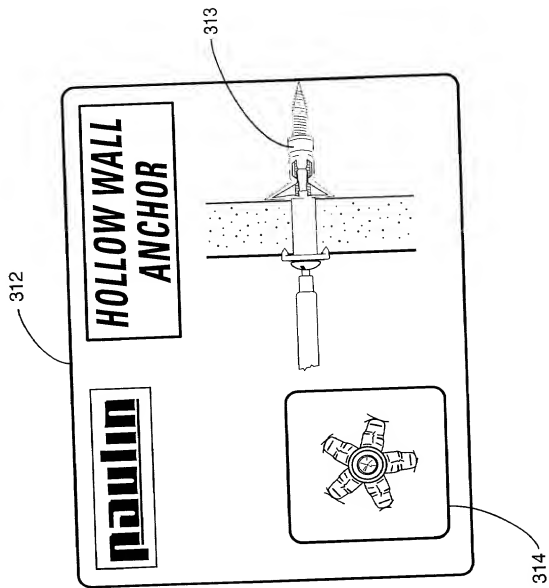




Hollow Wall Anchor



Hollow Wall Anchors or "Molly" anchors are designed to expand and grip as the screw is tightened in drywall or other hollow wall applications. These anchors are available in various wall thicknesses, therefore check size designation on the package. Once installed screw may be removed and re-installed as often as required. For drill type anchors, drill hole size slightly larger than anchor and install. For hammer-in type, simply install by tapping in with a hammer.



Installation Video Demonstration

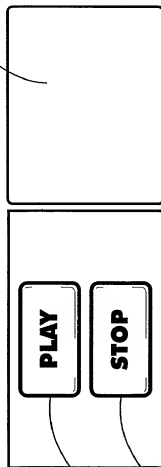



FIG 11

246

Hard to Find Items

280

HOME

PART
'A'

326

PART
'B'


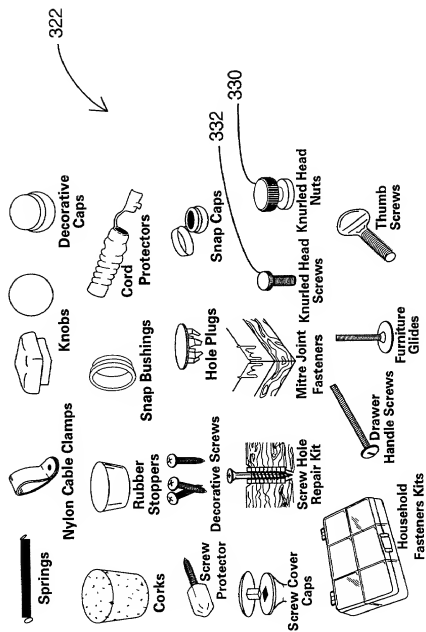


FIG 12



Knurled Nuts

Knurled Brass Nuts are used to attach diffuser shields on square recessed lighting fixtures found throughout many homes, recreation rooms, bathrooms and mobile homes. Knurled Nuts are also found on many electrical fixtures where the threaded stud is anchored in the junction box and the fixture is mounted over and through the studs. Knurled Nuts are hollow allowing adjustment anywhere along the tread of the stud.

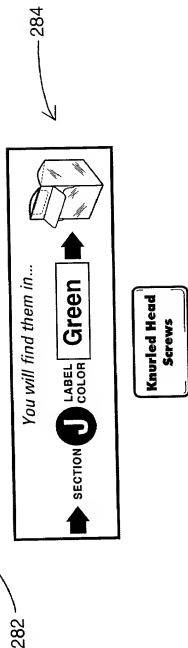




FIG 13

252


Knurled Screws

278

BACK


280

HOME



Knurled Screws

Knurled Head Screws are available in either Brass or Chrome Plate Steel in various lengths. These screws are used predominately for attaching glass globes to light fixtures on Ceiling Fans. Bathroom, Kitchen and Bedroom lights as well as exterior lights. Knurled screws are installed or removed using finger pressure and can be used as decorative adjustment screws on a variety of other products.



You will find them in...



SECTION

LABEL

COLOR

Yellow



FIG 14

248

Hard to Find Items

280

HOME

Glazier Points



Canvas Fasteners



Chair Protector




Door Hinge Pins



Shear Pins



Bullbuster Screws



Acoustic Lag Screws



Beeswax



Safety Caps



Computer Grommets



Faucet Screws




Vacuum Connectors



Fan Blade Screws



Scissors



Leg Levelers



Switch Plate Screws



Wire Grommets



Chicago Screws



Clevis Yokes



322

PART 'A'

328

PART 'B'

FIG 15

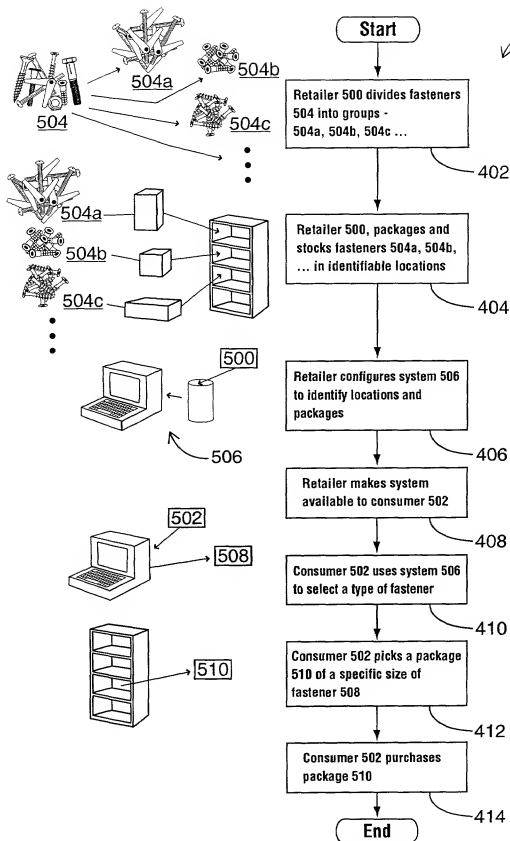


FIG 16